




 **Panaracer**
Life Cycling Partner

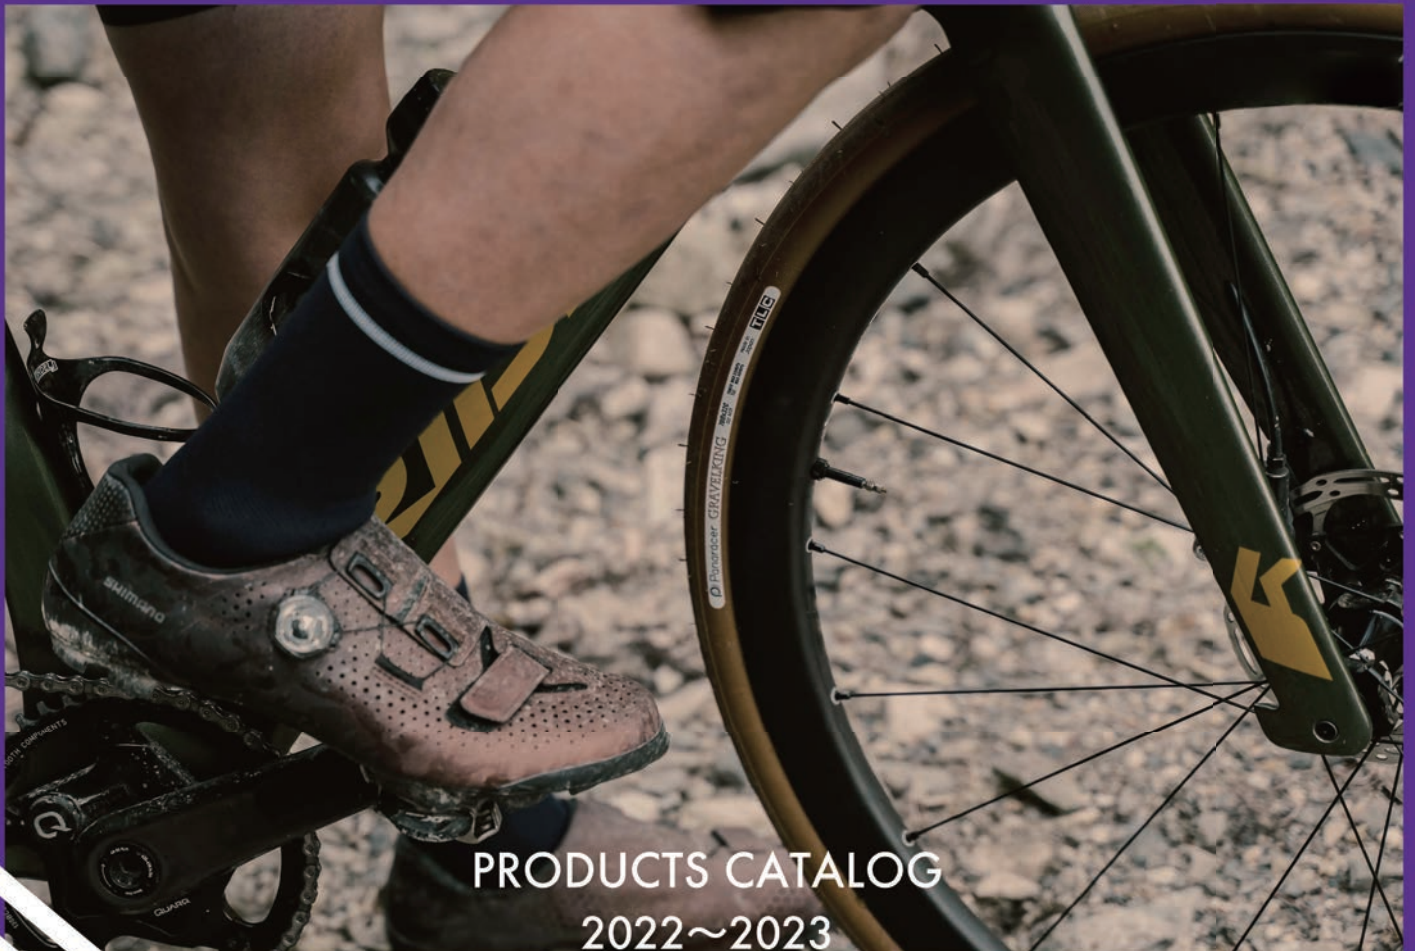

PRODUCTS CATALOG
2022~2023

GRAVELKING



From paved roads to gravel, go where you've never gone before with the superior puncture resistance and low rolling resistance of the GravelKing.

Made for adventures near and far, enhanced performance and durability, combined with light weight make the Gravelking the perfect tire for worry free cycling.

From pavement to rough forest and gravel roads, the Gravelking has you covered. The Gravelking is faster and more comfortable on paved roads and tougher on rough forest and gravel roads.

Expand your field of play with the GravelKing no matter where your legs take you.

GRAVEL KING

Choose from Five different GravelKing tread patterns to match your style and needs.




The original GravelKing is ideal for pavement and short detours from paved roads to gravel, the GravelKing SK, is excellent for driving on rough roads, and the GravelKing SS, offers the perfect balance between the original GravelKing and the more robust SK. The GravelKing AC adds more bite and excellent shedding capabilities to keep you in constant contact with the ground. The GravelKing EXT digs just deep enough in muddy conditions bogged down in the muck and keep you moving over the ground with confidence.

TECHNOLOGY

"ZSG Natural Compound" for superior durability and wear resistance

"AX- α Cord" for lightness and suppleness

"Anti-Flat Casing" is effective against side cuts and rim punctures.

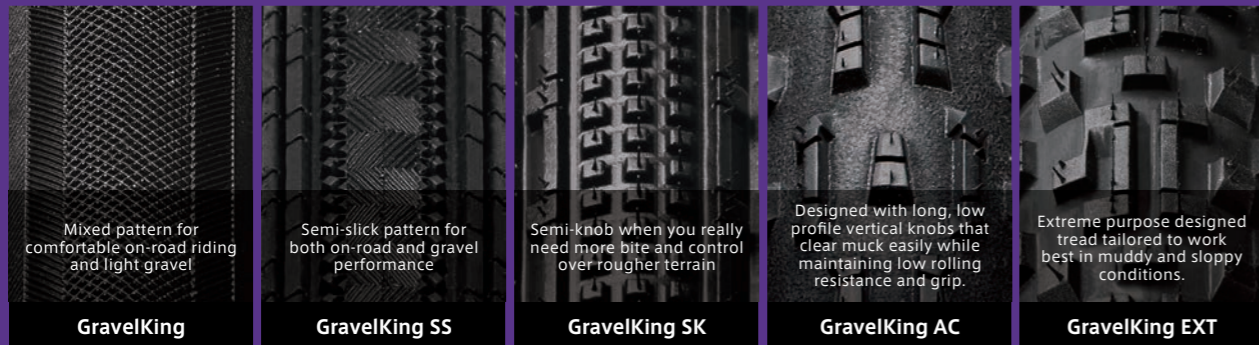

Mixed pattern for comfortable on-road riding and light gravel

GravelKing

Semi-slick pattern for both on-road and gravel performance

GravelKing SS

Semi-knob when you really need more bite and control over rougher terrain

GravelKing SK

Designed with long, low profile vertical knobs that clear muck easily while maintaining low rolling resistance and grip.

GravelKing AC

Extreme purpose designed tread tailored to work best in muddy and sloppy conditions.

GravelKing EXT


GravelKing Plus

GravelKing SS Plus

GravelKing SK Plus

GravelKing EXT Plus

The strongest version with improved puncture resistance with the addition of our proprietary ProTite material under the tread. The + Plus version is available in four models of GravelKing.

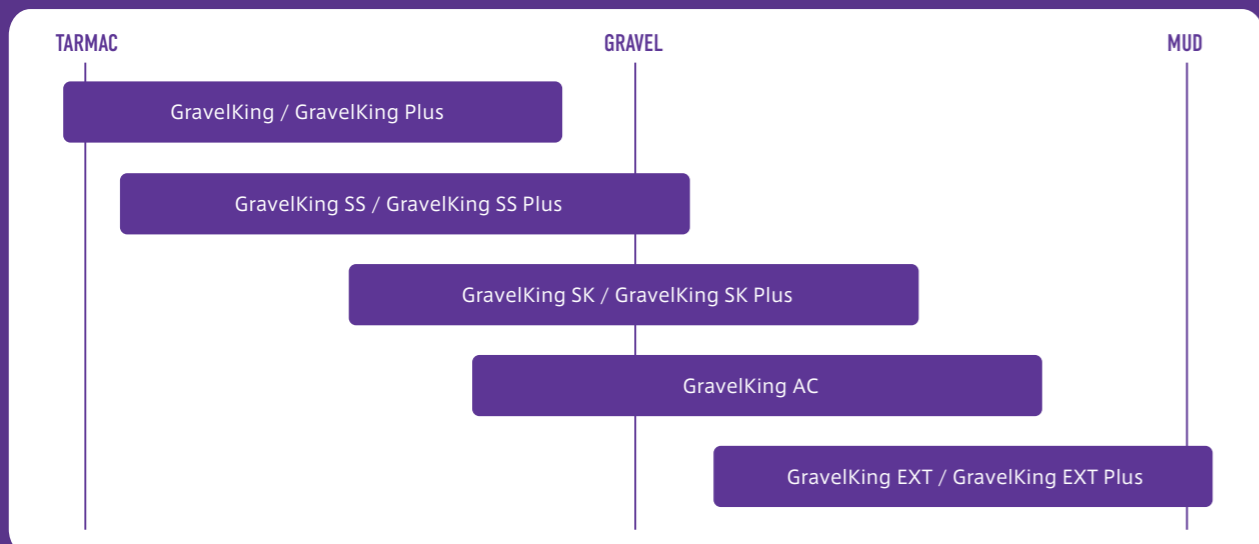



TLC Part numbers are TLC (TUBELESS COMPATIBLE) models.


GRAVEL



GravelKing Plus

TUBED TUBELESS COMPATIBLE

Gravel and dirt. Rough and smooth pavement. The most durable version of the "GravelKing" series.

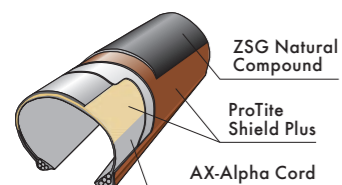

SIZE VARIATIONS
700×26C | 28C | 32C | 35C | 38C | 43C

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
700×26C	26-622	Folding	Black	Black/Brown	270	MAX 735/MAX 105
700×28C	28-622	Folding	Black	Black/Brown	310	MAX 735/MAX 105
700×32C	32-622	Folding	Black	Black/Brown	330	MAX 400/MAX 60 ^{*1} , MAX 650/MAX 95 ^{*2}
700×35C	35-622	Folding	Black	Black/Brown	350	MAX 400/MAX 60 ^{*1} , MAX 500/MAX 70 ^{*2}
700×38C	40-622	Folding	Black	Black/Brown	380	MAX 400/MAX 60 ^{*1} , MAX 525/MAX 75 ^{*2}
700×43C	43-622	Folding	Black	Black/Brown	450	MAX 400/MAX 60


*1 TUBELESS COMPATIBLE *2 TUBED

GravelKing SS Plus

TUBED TUBELESS COMPATIBLE



A drier condition, race day ready and fast rolling tire. The most durable version of the "GravelKing SS" series.



SIZE VARIATIONS
700×28C | 32C | 35C | 38C | 43C
27.5×1.75(650B×43) | 1.90(650B×48)

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
700×28C	28-622	Folding	Black	Black/Brown	350	MAX 750/MAX 110
700×32C	32-622	Folding	Black	Black/Brown	360/370 ^{*1}	MAX 400/MAX 60 ^{*2} , MAX 650/MAX 95 ^{*3}
700×35C	35-622	Folding	Black	Black/Brown	420	MAX 400/MAX 60 ^{*2} , MAX 525/MAX 75 ^{*3}
700×38C	40-622	Folding	Black	Black/Brown	460	MAX 400/MAX 60 ^{*2} , MAX 525/MAX 75 ^{*3}
700×43C	43-622	Folding	Black	Black/Brown	550	MAX 400/MAX 60
27.5×1.75(650B×43)	43-584	Folding	Black	Black/Brown	510	MAX 400/MAX 60
27.5×1.90(650B×48)	48-584	Folding	Black	Black/Brown	600	MAX 350/MAX 50


*1 Brown side tire *2 TUBELESS COMPATIBLE *3 TUBED

GravelKing SK Plus

TUBED TUBELESS COMPATIBLE



Gravel, dirt or rough pavement. The most durable version of the "GravelKing SK" series.



SIZE VARIATIONS
700×28C | 32C | 35C | 38C | 43C | 50C
26×2.10
27.5×1.90(650B×48) | 2.10(650B×54)
29×2.10

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
700×28C	28-622	Folding	Black	Black/Brown	310	MAX 750/MAX 110
700×32C	32-622	Folding	Black	Black/Brown	360/370 ^{*1}	MAX 400/MAX 60 ^{*2} , MAX 650/MAX 95 ^{*3}
700×35C	35-622	Folding	Black	Black/Brown	420	MAX 400/MAX 60 ^{*2} , MAX 500/MAX 70 ^{*3}
700×38C	40-622	Folding	Black	Black/Brown	480	MAX 400/MAX 60 ^{*2} , MAX 525/MAX 75 ^{*3}
700×43C	43-622	Folding	Black	Black/Brown	550	MAX 400/MAX 60
700×50C	50-622	Folding	Black	Black/Brown	640	MAX 350/MAX 50
26×2.10	54-559	Folding	Black	Black/Brown	610	MAX 350/MAX 50
27.5×1.90(650B×48)	48-584	Folding	Black	Black/Brown	600	MAX 350/MAX 50
27.5×2.10(650B×54)	54-584	Folding	Black	Black/Brown	630	MAX 350/MAX 50
29×2.10	54-622	Folding	Black	Black/Brown	680	MAX 350/MAX 50


*1 Brown side tire *2 TUBELESS COMPATIBLE *3 TUBED

GravelKing EXT Plus

TUBELESS COMPATIBLE



Gravel and dirt, Mud/Loose condition model. Better puncture resistance while retaining the superb balance of a light riding feel and grip.



SIZE VARIATIONS
700×33C | 35C | 38C

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
700×33C	33-622	Folding	Black	Black/Brown	370	MAX 400/MAX 60
700×35C	35-622	Folding	Black	Black/Brown	420	MAX 400/MAX 60 ^{*1} , MAX 525/MAX 75 ^{*2}
700×38C	40-622	Folding	Black	Black/Brown	480	MAX 400/MAX 60 ^{*1} , MAX 525/MAX 75 ^{*2}

*1 TUBELESS COMPATIBLE *2 TUBED

GRAVEL / ADVENTURE

ROAD

MTB

CYCLO CROSS

COMMUTER & CITY

COMPACT

WHEEL CHAIR

TUBE

ACCESSORIES

GRAVEL / ADVENTURE

ROAD

MTB

CYCLO CROSS

COMMUTER & CITY

COMPACT

WHEEL CHAIR

TUBE

ACCESSORIES




GravelKing

TUBED TUBELESS COMPATIBLE

ZSG Natural Compound AX-Q Advanced Extra Alpha Cord Anti-Flat Casing

Gravel and dirt. Rough and smooth pavement.



SIZE VARIATIONS

700×23C | 26C | 28C | 32C | 35C | 38C | 43C
27.5×1.50(650B×38) | 1.75(650B×42) | 1.90(650B×48)

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
700×23C	23-622	Folding	Black	Black/Brown	220	700-875/100-125
700×26C	26-622	Folding	Black	Black/Brown	240	MAX 735/MAX 105
700×28C	28-622	Folding	Black	Black/Brown	270	MAX 735/MAX 105
700×32C	32-622	Folding	Black	Black/Brown	290	MAX 400/MAX 60 ^{*1} , MAX 650/MAX 95 ^{*2}
700×35C	35-622	Folding	Black	Black/Brown	310	MAX 400/MAX 60 ^{*1} , MAX 500/MAX 70 ^{*2}
700×38C	40-622	Folding	Black	Black/Brown	340	MAX 400/MAX 60 ^{*1} , MAX 525/MAX 75 ^{*2}
TLC 700×43C	43-622	Folding	Black	Black/Brown	380	MAX 400/MAX 60
27.5×1.50(650B×38)	38-584	Folding	Black	Black/Brown	320	MAX 400/MAX 60
27.5×1.75(650B×42)	42-584	Folding	Black	Black/Brown	360	MAX 400/MAX 60
27.5×1.90(650B×48)	48-584	Folding	Black	Black/Brown	520	MAX 350/MAX 50

*1 TUBELESS COMPATIBLE *2 TUBED




GravelKing SS

TUBED TUBELESS COMPATIBLE

ZSG Natural Compound AX-Q Advanced Extra Alpha Cord Anti-Flat Casing

A drier condition, race day ready and fast rolling tire.



SIZE VARIATIONS

700×28C | 32C | 35C | 38C | 43C
27.5×1.50(650B×38) | 1.75(650B×43) | 1.90(650B×48)

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
700×28C	28-622	Folding	Black	Black/Brown	310	MAX 750/MAX 110
700×32C	32-622	Folding	Black	Black/Brown	320/330 ^{*1}	MAX 400/MAX 60 ^{*2} , MAX 650/MAX 95 ^{*3}
700×35C	35-622	Folding	Black	Black/Brown	380	MAX 400/MAX 60 ^{*2} , MAX 525/MAX 75 ^{*3}
700×38C	40-622	Folding	Black	Black/Brown	410	MAX 400/MAX 60 ^{*2} , MAX 525/MAX 75 ^{*3}
TLC 700×43C	43-622	Folding	Black	Black/Brown	480	MAX 400/MAX 60
27.5×1.50(650B×38)	38-584	Folding	Black	Black/Brown	380	MAX 400/MAX 60
27.5×1.75(650B×43)	43-584	Folding	Black	Black/Brown	450	MAX 400/MAX 60
27.5×1.90(650B×48)	48-584	Folding	Black	Black/Brown	540	MAX 350/MAX 50

*1 Brown side tire *2 TUBELESS COMPATIBLE *3 TUBED




GravelKing SK

TUBED TUBELESS COMPATIBLE

ZSG Natural Compound AX-Q Advanced Extra Alpha Cord Anti-Flat Casing

Gravel, dirt or rough pavement.



SIZE VARIATIONS

700×26C | 28C | 32C | 35C | 38C | 43C | 50C
26×2.10
27.5×1.75(650B×43) | 1.90(650B×48) | 2.10(650B×54)
29×2.10

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
700×26C	26-622	Folding	Black	Black	270	400-700/60-100
700×28C	28-622	Folding	Black	Black/Brown	280	MAX 750/MAX 110
700×32C	32-622	Folding	Black	Black/Brown	320/330 ^{*1}	MAX 400/MAX 60 ^{*2} , MAX 650/MAX 95 ^{*3}
700×35C	35-622	Folding	Black	Black/Brown	380	MAX 400/MAX 60 ^{*2} , MAX 500/MAX 70 ^{*3}
700×38C	40-622	Folding	Black	Black/Brown	430	MAX 400/MAX 60 ^{*2} , MAX 525/MAX 75 ^{*3}
700×43C	43-622	Folding	Black	Black/Brown	480	MAX 400/MAX 60
TLC 700×50C	50-622	Folding	Black	Black/Brown	570	MAX 350/MAX 50
26×2.10	54-559	Folding	Black	Black/Brown	590	MAX 350/MAX 50
27.5×1.75(650B×43)	43-584	Folding	Black	Black/Brown	450	MAX 400/MAX 60
27.5×1.90(650B×48)	48-584	Folding	Black	Black/Brown	540	MAX 350/MAX 50
27.5×2.10(650B×54)	54-584	Folding	Black	Black/Brown	620	MAX 350/MAX 50
29×2.10	54-622	Folding	Black	Black/Brown	660	MAX 350/MAX 50

*1 Brown side tire *2 TUBELESS COMPATIBLE *3 TUBED




GravelKing AC

TUBELESS COMPATIBLE

ZSG Natural Compound AX-Q Advanced Extra Alpha Cord Anti-Flat Casing

Gravel and dirt, All condition model.



SIZE VARIATIONS

700×33C | 35C

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
700×33C	33-622	Folding	Black	Black/Brown	300	MAX 400/MAX 60 ^{*1} , MAX 600/MAX 85 ^{*2}
700×35C	35-622	Folding	Black	Black/Brown	360	MAX 400/MAX 60 ^{*1} , MAX 500/MAX 70 ^{*2}

*1 TUBELESS COMPATIBLE *2 TUBED




GravelKing EXT



TUBELESS COMPATIBLE



Gravel and dirt, Mud/Loose condition model.



SIZE VARIATIONS
700×33C | 35C | 38C

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
700×33C	33-622	Folding	Black	Black/Brown	330	MAX 400/MAX 60
700×35C	35-622	Folding	Black	Black/Brown	380	MAX 400/MAX 60*1, MAX 525/MAX 75*2
700×38C	40-622	Folding	Black	Black/Brown	430	MAX 400/MAX 60*1, MAX 525/MAX 75*2

*1 TUBELESS COMPATIBLE *2 TUBED



COL DE LA VIE Randonnee



TUBED



Classic Randonnee/Touring model.

SIZE VARIATIONS
26×1-3/8×1-1/2 | 1-1/2

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
26×1-3/8×1-1/2	40-590	Wire	Black	Amber	410	MAX 300/MAX 45
26×1-1/2	40-584	Wire	Black	Amber	400	MAX 300/MAX 45



Pari-Moto



TUBED



PACENTI gravel and urban model.

SIZE VARIATIONS
27.5×1.50(650B×38) | 1.75(650B×42) | 1.90(650B×48)

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
27.5×1.50(650B×38)	38-584	Folding	Black	Black/Amber	310	MAX 400/MAX 60
27.5×1.75(650B×42)	42-584	Folding	Black	Black/Amber	340	MAX 400/MAX 60
27.5×1.90(650B×48)	48-584	Folding	Black	Black/Amber	500	MAX 350/MAX 50



©Daniel Hughes

The Panaracer Ratio. A New Apex

Made in Japan.
panaracer.com

The Panaracer Ratio
is a completely new way of
thinking about Road Tires

After a long period of research and development
Panaracer has arrived at a new Apex
in road tire development never before achieved.
The goal of the ratio is to combine high puncture resistance, grip,
and suppleness while maintaining a light rolling performance.
This is the Panaracer Ratio.

From the deep experience of Panaracer development comes the new definition of road tires; Agilest.

AGILEST



The new ZSG AGILE compound TF Super Belt/ Outer Shield
bring this vision into reality in the new
Agilest series for all riding style and conditions.



AGILEST

A line up of three types available for various racing categories.




Choose the AGILEST model that suits you and your riding conditions the best. From the AGILEST that works best for all conditions, to the AGILEST DURO when you need added puncture protection, to the AGILEST LIGHT when light weight and superior suppleness are key to getting the most from your ride.

TECHNOLOGY

Panaracer has further refined and updated our technologies and compounds to work with the New ETRTO standards reduce rolling resistance further by 12% over our RACE EVO4 series.

Tirelessly working to reduce rolling
"ZSG AGILE Compound"

High puncture resistance, comfort and light weight.
"TF Super Belt/Outer Shield"

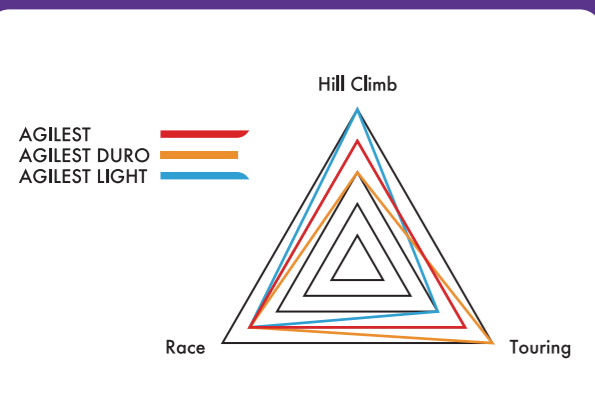

2020 ETRTO STANDARDS

TIRE SIZE	RIM SIZE			
	622-15C	622-17C	622-19C	622-21C
700-23C	22mm	23mm	24mm	
700-25C		24mm	25mm	26mm
700-28C		27mm	28mm	29mm
700-30C			29mm	30mm



ROAD



RACING

TRAINING

AGILEST/TU/TLR

Closer Plus

CatalystSport

AGILEST LIGHT

Practice

AGILEST DURO

Practice Dual

Practice Dual TG

AGILEST TLR




TUBELESS READY

AGILEST TLR (Tubeless Ready) is built on the same sturdy platform as the AGILEST clincher, our TLR version also demonstrates the "Panaracer Ratio" found throughout the line with its balance of performance, puncture resistance, and grip while providing a smooth ride with exceptionally low rolling resistance.



SPEC

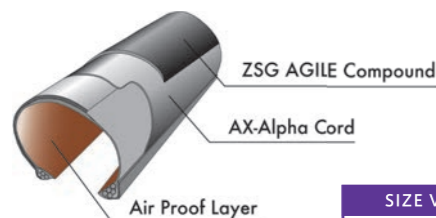

SIZE VARIATIONS
700×25C | 28C | 30C

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
700×25C NEW	25-622	Folding	Black	Black	220	MAX 800/MAX 115
700×28C NEW	28-622	Folding	Black	Black	250	MAX 650/MAX 95
700×30C NEW	30-622	Folding	Black	Black	270	MAX 600/MAX 85

AGILEST




TUBED



The AGILEST is the foundation of our new road series. AGILEST is designed to perform seamlessly in all weather and road conditions, it is equally at home whether you're an enthusiast or a racer.

SPEC



SIZE VARIATIONS

700×23C | 25C | 28C

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
700×23C NEW	23-622	Folding	Black	Black/Amber	180	MAX 1050/MAX 150
700×25C NEW	25-622	Folding	Black	Black/Amber/Blue/Red	190	MAX 980/MAX 140
700×28C NEW	28-622	Folding	Black	Black/Amber	210	MAX 750/MAX 110

AGILEST DURO




TUBED



AGILEST Duro maintains a perfect balance of toughness and suppleness to add spring to your ride. When you need more protection from bad road conditions but still want a performance tire with pro-level specification, AGILEST Duro is the tire for you.

SPEC



SIZE VARIATIONS

700×23C | 25C | 28C

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
700×23C NEW	23-622	Folding	Black	Black	210	MAX 1050/MAX 150
700×25C NEW	25-622	Folding	Black	Black	220	MAX 980/MAX 140
700×28C NEW	28-622	Folding	Black	Black	250	MAX 750/MAX 110

AGILEST LIGHT




TUBED



AGILEST Light is made for time trials, hill climbs, and anytime you need the lightest tire but are unwilling to compromise security and performance for weight alone. Feel like you're riding on air while knowing you're confidently connected to the ground with AGILEST Light!

SPEC



SIZE VARIATIONS

700×23C | 25C

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
700×23C NEW	23-622	Folding	Black	Black	160	MAX 1050/MAX 150
700×25C NEW	25-622	Folding	Black	Black	170	MAX 980/MAX 140




AGILEST TU

TUBULAR



Pannaracer has a long history of producing some of the highest quality, handcrafted tubular bicycle tires globally. And the AGILEST TU builds on that storied reputation and takes tubular tire technology to a new level.

SPEC


SIZE VARIATIONS
 700C×25mm

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
700C×25mm NEW		Folding	Black	Black	260	600-900/85-145



CatalystSport

TUBED

Sport and Training tire at an affordable price.

SIZE VARIATIONS
 700×23C | 25C | 28C

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
700×23C	23-622	Folding	Black Black/Blue Black/Red Black/White Black/Yellow	Black	205/220*	685-830/100-120
700×23C	23-622	Wire	Black Black/Blue Black/Red Black/White Black/Yellow	Black	295/310*	685-830/100-120
700×25C	25-622	Folding	Black Black/Blue Black/Red Black/White Black/Yellow	Black	215/235*	620-755/90-110
700×25C	25-622	Wire	Black Black/Blue Black/Red Black/White Black/Yellow	Black	320/340*	620-755/90-110
700×28C	28-622	Folding	Black Black/Blue Black/Red Black/White Black/Yellow	Black	TBA	550-685/80-100
700×28C	28-622	Wire	Black Black/Blue Black/Red Black/White Black/Yellow	Black	TBA	550-685/80-100

* Colored tires



© Daniel Hughes



Closer Plus

TUBED



Light weight Racing/Training model with puncture belt.

SPEC

 Other specs
 Microfile Pattern

SIZE VARIATIONS
 700×20C | 23C | 25C | 28C
 650×23C

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
700×20C	20-622	Folding	Black	Black	190	750-1050/110-155
700×23C	23-622	Folding	Black Black/Blue Black/Red Black/White	Black	210	700-1050/100-150
700×25C	25-622	Folding	Black Black/Red	Black	220	630-980/90-140
700×28C	28-622	Folding	Black	Black	240	MAX 750/MAX 110
650×23C	23-571	Folding	Black	Black	190	700-1050/100-150



Practice Dual/Dual TG

TUBULAR



Dual Compound Tubular. ^{*1}
 Puncture belted training Tubular. ^{*2}

SPEC

 Other specs
 Butyl tube
 Removable Presta Valve 42mm

SIZE VARIATIONS
 700C × 22.5mm

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
700C × 22.5mm ^{*1}	—	Tubular	Black/Yellow	Amber	270	640-730/90-105
700C × 22.5mm ^{*2}	—	Tubular	Black/Red	Amber	300	640-730/90-105



Practice

TUBULAR

Training Tubular.


SPEC

 Other specs
 Butyl tube
 Removable Presta Valve 42mm

SIZE VARIATIONS
 650C × 21mm
 700C × 22.5mm | 25mm

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
650C × 21mm	—	Tubular	Black	Amber	230	640-730/90-105
700C × 22.5mm	—	Tubular	Black	Black/Amber	270	640-730/90-105
700C × 25mm	—	Tubular	Black	Black/Amber	320	640-900/90-130

MTB

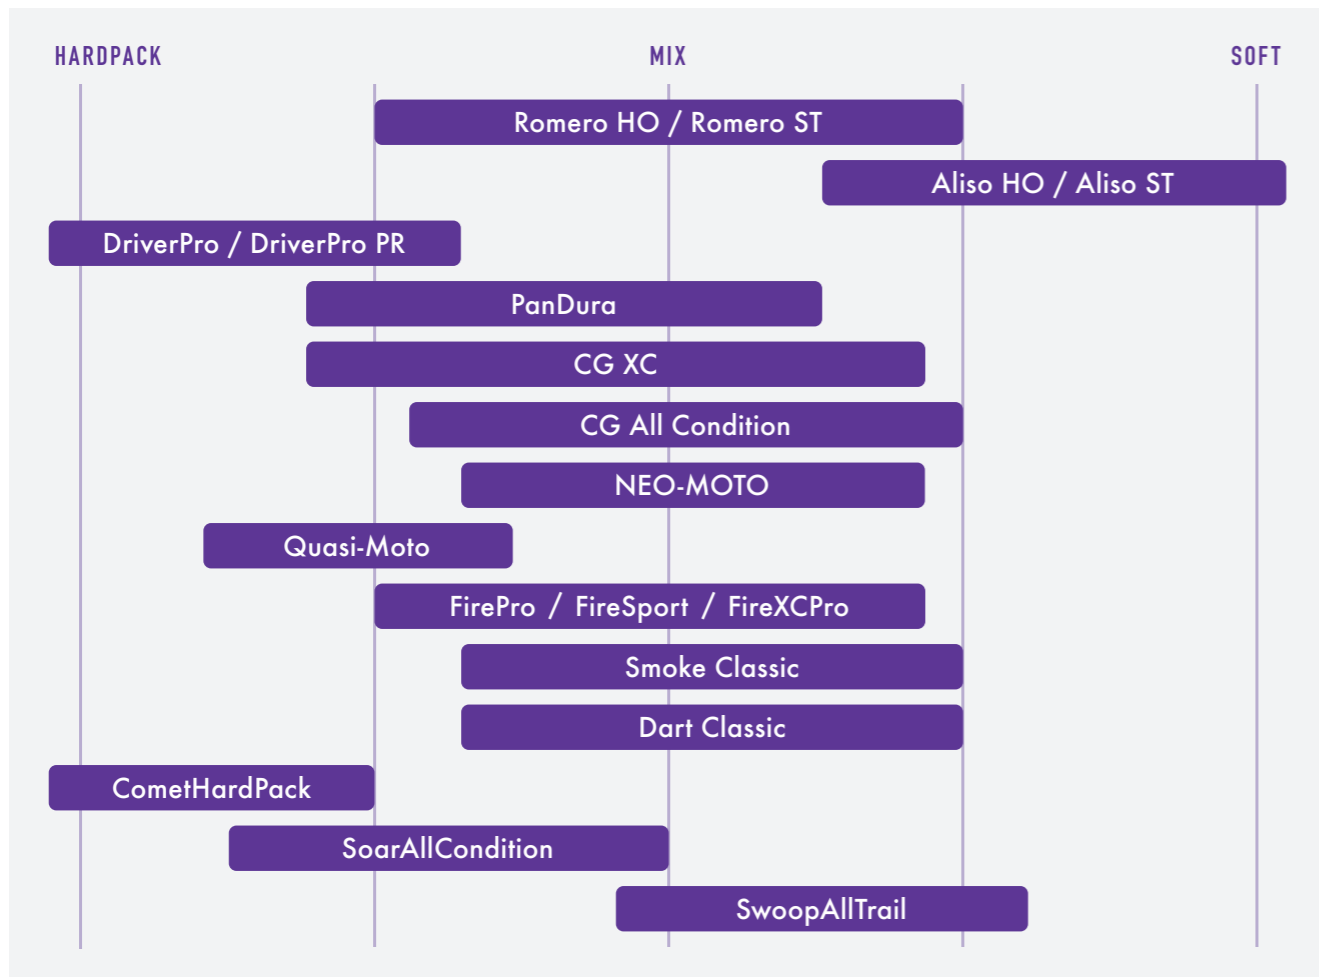


Romero HO

TUBELESS COMPATIBLE



Aggressive all condition EnduroTrail tire with a lightweight, supple casing and outstanding grip and longevity.

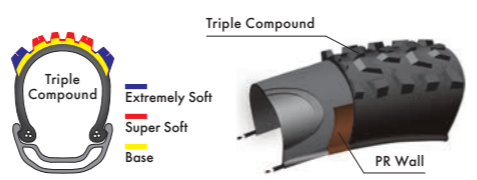

SIZE VARIATIONS
27.5x2.40 | 2.60
29x2.40 | 2.60

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
27.5x2.40	60-584	Folding	Black	Black	880	MAX 360/MAX 52
27.5x2.60	65-584	Folding	Black	Black	930	MAX 330/MAX 47
29x2.40	60-622	Folding	Black	Black	940	MAX 360/MAX 52
29x2.60	65-622	Folding	Black	Black	990	MAX 330/MAX 47




Romero ST

TUBELESS COMPATIBLE



Aggressive DH/Enduro, All condition model with superior puncture resistance.

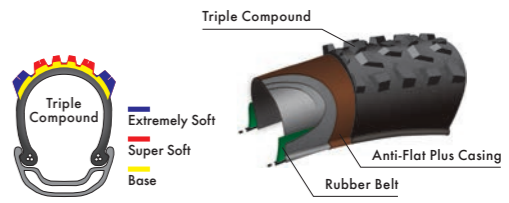

SIZE VARIATIONS
27.5x2.40 | 2.60
29x2.40 | 2.60

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
27.5x2.40	60-584	Folding	Black	Black	1060	MAX 360/MAX 52
27.5x2.60	65-584	Folding	Black	Black	1090	MAX 330/MAX 47
29x2.40	60-622	Folding	Black	Black	1200	MAX 360/MAX 52
29x2.60	65-622	Folding	Black	Black	1300	MAX 330/MAX 47




Aliso HO

TUBELESS COMPATIBLE



Softer and looser condition Enduro/Trail tire with a light, supple casing and superior grip and performance.

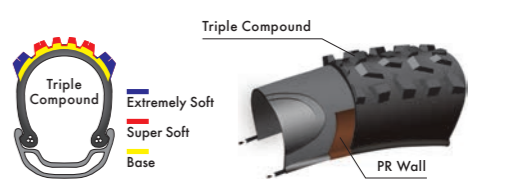

SIZE VARIATIONS
27.5x2.40 | 2.60
29x2.40 | 2.60

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
27.5x2.40	60-584	Folding	Black	Black	830	MAX 360/MAX 52
27.5x2.60	65-584	Folding	Black	Black	880	MAX 330/MAX 47
29x2.40	60-622	Folding	Black	Black	890	MAX 360/MAX 52
29x2.60	65-622	Folding	Black	Black	940	MAX 330/MAX 47



©Daniel Hughes

GRAVEL / ADVENTURE

ROAD

MTB

CYCLO CROSS

COMMUTER & CITY

COMPACT

WHEEL CHAIR

TUBE

ACCESSORIES

GRAVEL / ADVENTURE

ROAD

MTB

CYCLO CROSS

COMMUTER & CITY

COMPACT

WHEEL CHAIR

TUBE

ACCESSORIES

GRAVEL / ADVENTURE ROAD

MTB

CYCLO CROSS

COMMUTER & CITY

COMPACT

WHEEL CHAIR

TUBE

ACCESSORIES

GRAVEL / ADVENTURE ROAD

MTB

CYCLO CROSS

COMMUTER & CITY

COMPACT

WHEEL CHAIR

TUBE

ACCESSORIES




Aliso ST

TUBELESS COMPATIBLE



Faster DH/Enduro, Soft-Loose condition model with superior puncture resistance.

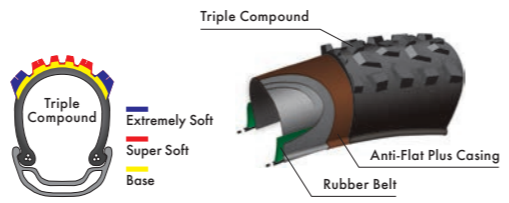

SIZE VARIATIONS
27.5×2.40 | 2.60
29×2.40 | 2.60

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
27.5×2.40	60-584	Folding	Black	Black	1030	MAX 360/MAX 52
27.5×2.60	65-584	Folding	Black	Black	1060	MAX 330/MAX 47
29×2.40	60-622	Folding	Black	Black	1180	MAX 360/MAX 52
29×2.60	65-622	Folding	Black	Black	1240	MAX 330/MAX 47




DriverPro PR

TUBELESS COMPATIBLE



More puncture protected Driver.



SIZE VARIATIONS
27.5×2.22
29×2.20

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
27.5×2.22	56-584	Folding	Black	Black	650	200-380/30-55
29×2.20	55-622	Folding	Black	Black	660	200-380/30-55



DriverPro

TUBELESS COMPATIBLE



Light, Fast, and All around performer.

SIZE VARIATIONS
26×2.10
27.5×2.22 | 2.40 | 2.60
29×2.20 | 2.40 | 2.60

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
26×2.10 ^{*1}	54-559	Folding	Black	Black	560	200-380/30-55
27.5×2.22 ^{*1}	56-584	Folding	Black	Black	590	200-380/30-55
27.5×2.40 ^{*2}	60-584	Folding	Black	Black	790	MAX 360/MAX 52
27.5×2.60 ^{*2}	65-584	Folding	Black	Black	810	MAX 330/MAX 47
29×2.20 ^{*1}	55-622	Folding	Black	Black	590	200-380/30-55
29×2.40 ^{*2}	60-622	Folding	Black	Black	850	MAX 360/MAX 52
29×2.60 ^{*2}	65-622	Folding	Black	Black	880	MAX 330/MAX 47




PanDura

TUBELESS COMPATIBLE TUBED



Powerful Enduro/All Mountain, All condition model with superior puncture resistance.

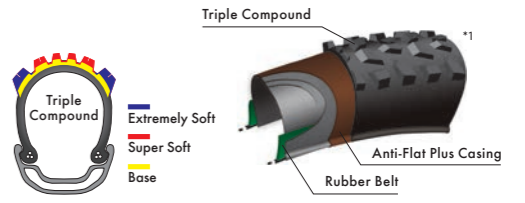

SIZE VARIATIONS
27.5×2.40

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
27.5×2.40 ^{*1}	60-584	Folding	Black	Black	1180	200-400/30-60
27.5×2.40 ^{*2}	60-584	Wire	Black	Black	1185	200-400/30-60

^{*1} TUBELESS COMPATIBLE ^{*2} TUBED



CG XC

TUBED



Cedric Gracia singnated Cross-Country Racing.

SIZE VARIATIONS
26×2.10
29×2.25

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
26×2.10	54-559	Folding	Black	Black	640	240-380/35-55
29×2.25	57-622	Folding	Black	Black	860	200-380/30-55

GRAVEL / ADVENTURE ROAD

MTB

CYCLO CROSS

COMMUTER & CITY

COMPACT

WHEEL CHAIR

TUBE

ACCESSORIES

GRAVEL / ADVENTURE ROAD

MTB

CYCLO CROSS

COMMUTER & CITY

COMPACT

WHEEL CHAIR

TUBE

ACCESSORIES

CG All Condition

TUBELESS COMPATIBLE



Cedric Gracia singnated All Condition model.

SIZE VARIATIONS
26x2.35

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
26x2.35	58-559	Folding	Black	Black	780	200-380/30-55



SIZE VARIATIONS
27.5x2.35
29x2.35

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
27.5x2.35	60-584	Folding	Black	Black	810	250-450/35-65
29x2.35	60-622	Folding	Black	Black	850	250-450/35-65



FirePro

TUBELESS COMPATIBLE



Enduro/All Mountain, all condition model.



Neo-Moto

TUBED



PACENTI all condition model.

SIZE VARIATIONS
27.5x2.10 | 2.30

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
27.5x2.10	54-584	Folding	Black	Black	650	240-380/35-55
27.5x2.30	58-584	Folding	Black	Black	740	240-380/35-55

SIZE VARIATIONS
27.5x2.35
29x2.35

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
27.5x2.35	60-584	Wire	Black	Black	900	250-450/35-65
29x2.35	60-622	Wire	Black	Black	930	250-450/35-65

FireSport

TUBED



Enduro/All Mountain model.

Quasi-Moto

TUBED



PACENTI faster and dry condition model.

SIZE VARIATIONS
27.5x2.00

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
27.5x2.00	51-584	Folding	Black	Black	570	240-380/35-55

FireXCPro

TUBELESS COMPATIBLE TUBED



Cross-Country, All terrain model.

SIZE VARIATIONS
26x2.10

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
26x2.10 ¹	50-559	Folding	Black/Red	Black	620	240-400/35-58
26x2.10 ²	50-559	Wire	Black/Red	Black	710	240-400/35-58



¹ TUBELESS COMPATIBLE ² TUBED



Smoke Classic



TUBED



The original rear classics.

SIZE VARIATIONS
26×2.10

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
26×2.10	50-559	Folding	Black	Black/Amber	590/620*	200-450/30-65

*Amber side tire



SoarAllCondition

TUBED

XC/Marathon model.

SIZE VARIATIONS
26×1.95 | 2.10
29×2.0

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
26×1.95	47-559	Folding/Wire	Black	Black	500/610*	250-450/35-65
26×2.10	52-559	Folding/Wire	Black	Black	570/680*	250-450/35-65
29×2.0	50-622	Folding/Wire	Black	Black	560/690*	250-450/35-65

*Wire bead tires



Dart Classic



TUBED



The original front classics.

SIZE VARIATIONS
26×2.10

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
26×2.10	50-559	Folding	Black	Black/Amber	580/600*	200-450/30-65

*Amber side tire



CometHardPack

TUBED

XC HardPack model.

SIZE VARIATIONS
700×38C
26×1.95 | 2.10 | 2.25
27.5×2.00 | 2.20
29×2.10

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
700×38C	40-622	Folding/Wire	Black	Black	465/565*	300-500/44-73
26×1.95	47-559	Folding/Wire	Black	Black	500/620*	250-450/35-65
26×2.10	52-559	Folding/Wire	Black	Black	535/660*	250-450/35-65
26×2.25	54-559	Folding/Wire	Black	Black	680/760*	250-450/35-65
27.5×2.00	50-584	Folding/Wire	Black	Black	540/650*	270-440/40-65
27.5×2.20	54-584	Folding/Wire	Black	Black	590/715*	250-450/35-65
29×2.10	52-622	Folding/Wire	Black	Black	600/730*	250-450/35-65

*Wire bead tires



SwoopAllTrail

TUBED

XC Loose condition/All mountain model.

SIZE VARIATIONS
26×2.10 | 2.25 | 2.4
27.5×2.10

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
26×2.10	52-559	Folding/Wire	Black	Black	570/680*	250-450/35-65
26×2.25	54-559	Folding/Wire	Black	Black	640/760*	250-450/35-65
26×2.4	60-559	Folding/Wire	Black	Black	730/850*	250-450/35-65
27.5×2.10	52-584	Folding/Wire	Black	Black	660/780*	250-450/35-65

*Wire bead tires



Fat B Nimble

TUBED

All terrain for FAT and Plus size model.

SIZE VARIATIONS
26×4.0
27.5×3.00
29×3.00


Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
26×4.0	97-559	Folding/Wire	Black	Black	1180/1370*	MAX 140/MAX 20
27.5×3.00	76-584	Folding	Black	Black	710	MAX 250/MAX 35
29×3.00	76-622	Folding	Black	Black	765	MAX 250/MAX 35

*Wire bead tires



TLC Part numbers are TLC (TUBELESS COMPATIBLE) models.

CYCLO CROSS

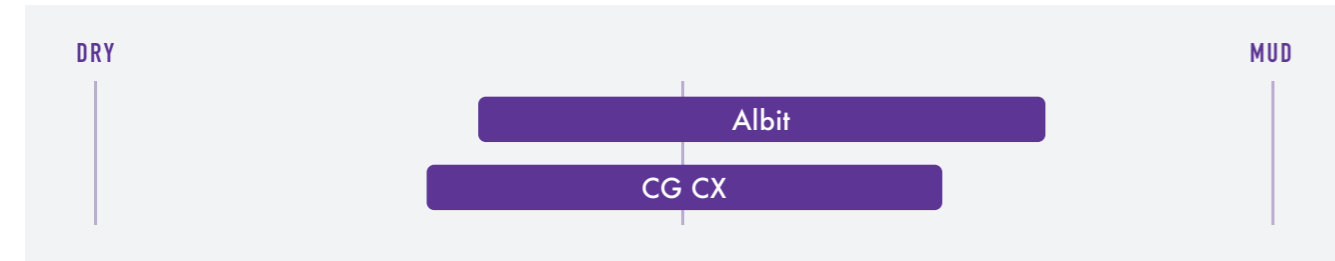

Albit

TUBELESS COMPATIBLE



The tubeless compatible cross tire that's been designed to perform at the highest level in all conditions.

SPEC Other specs Short Knob



SIZE VARIATIONS
700x33C

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
700x33C	33-622	Folding	Black	Black	330	MAX 400/MAX 60




CG CX

TUBELESS COMPATIBLE TUBED



Tubeless Compatible model of the Cyclo Cross "CG CX" tire, delivering a light riding feel and superior grip.

SPEC Other specs CG Tread Pattern



SIZE VARIATIONS
700x33C | 32C

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
700x33C ¹	33-622	Folding	Black	Black	360	MAX 400/MAX 60
700x32C ²	32-622	Folding	Black	Black	300	200-500/30-75



¹ TUBELESS COMPATIBLE ² TUBED


COMMUTER & CITY



RiBMo TUBED




Full protected, fast urban tire.

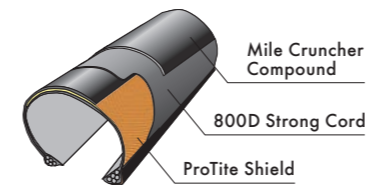

SIZE VARIATIONS
700x23C | 25C | 28C | 32C | 35C
26x1.25 | 1.50 | 1.75 | 2.00
27.5x1.50(650Bx38)

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
700x23C	23-622	Folding/Wire	Black	Black	310/360*	650-850/95-125
700x25C	25-622	Folding/Wire	Black	Black	340/390*	600-800/85-115
700x28C	28-622	Folding/Wire	Black	Black	390/440*	550-750/80-110
700x32C	32-622	Folding/Wire	Black	Black	410/460*	450-700/65-100
700x35C	35-622	Folding/Wire	Black	Black	520/570*	400-650/60-95
26x1.25	32-559	Folding/Wire	Black	Black	350/410*	400-650/60-95
26x1.50	37-559	Folding/Wire	Black	Black	460/510*	300-550/45-80
26x1.75	42-559	Folding/Wire	Black	Black	530/580*	250-500/35-70
26x2.00	48-559	Folding/Wire	Black	Black	560/610*	200-450/30-65
27.5x1.50(650Bx38)	38-584	Folding/Wire	Black	Black	490/540*	300-550/45-80

*Wire bead tires

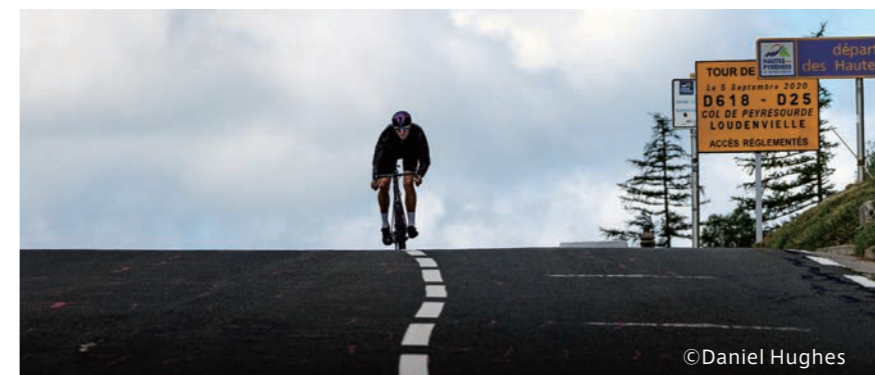

©Daniel Hughes

GRAVEL / ADVENTURE ROAD

MTB

CYCLO CROSS

COMMUTER & CITY

COMPACT

WHEEL CHAIR

TUBE

ACCESSORIES

GRAVEL / ADVENTURE ROAD

MTB

MTB

CYCLO CROSS

COMMUTER & CITY

COMPACT

WHEEL CHAIR

TUBE

ACCESSORIES



SIZE VARIATIONS
 700×25C | 28C | 32C | 35C
 26×1.25 | 1.50 | 1.75
 27.5×1.75(650B×42)

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
700×25C	25-622	Folding	Black/Red	Black	250	MAX 805/MAX 115
700×28C	28-622	Folding	Black/Red	Black	270	MAX 735/MAX 105
700×32C	32-622	Folding	Black	Black	350	MAX 665/MAX 95
700×35C	35-622	Folding	Black	Black	440	MAX 620/MAX 90
26×1.25	32-559	Folding	Black/Red	Black	250	455-700/65-100
26×1.50	37-559	Folding	Black/Red	Black	380	280-455/40-65
26×1.75	42-559	Folding	Black/Red	Black	460	280-455/40-65
27.5×1.75(650B×42)	42-584	Folding	Black/Red	Black	480	280-525/40-75

T-Serv

TUBED



High performance urban/city use.



SIZE VARIATIONS
 700×23C | 25C | 28C | 32C | 35C | 38C
 650×28C
 27×1 | 1-1/8 | 1-1/4
 26×1.25 | 1.50 | 1.75
 27.5×1.75(650B×42)

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
700×23C	23-622	Folding/Wire	Black	Amber/Black	220/270*	MAX 840/MAX 120
700×25C	25-622	Folding/Wire	Black	Amber/Black	250/310*	MAX 805/MAX 115
700×28C	28-622	Folding/Wire	Black	Amber/Black	270/330*	MAX 735/MAX 105
700×32C	32-622	Folding/Wire	Black	Amber/Black	350/400*	MAX 665/MAX 95
700×35C	35-622	Folding/Wire	Black	Amber/Black	440/490*	MAX 620/MAX 90
700×38C	38-622	Folding/Wire	Black	Amber/Black	420/470*	300-620/45-90
650×28C	28-622	Folding/Wire	Black	Amber	250/300*	MAX 750/MAX 105
27×1	25-630	Folding/Wire	Black	Amber	250/310*	MAX 805/MAX 115
27×1-1/8	28-630	Folding/Wire	Black	Amber	270/330*	MAX 735/MAX 105
27×1-1/4	32-630	Folding/Wire	Black	Amber	350/410*	MAX 665/MAX 95
26×1.25	32-559	Folding/Wire	Black	Amber/Black	250/300*	455-700/65-100
26×1.50	37-559	Folding/Wire	Black	Amber/Black	380/440*	280-455/40-65
26×1.75	42-559	Folding/Wire	Black	Amber/Black	460/510*	280-455/40-65
27.5×1.75(650B×42)	42-584	Folding/Wire	Black	Amber/Black	480/540*	280-525/40-75

*Wire bead tires

Pasela ProTite

TUBED



Puncture protected Pasela.



SIZE VARIATIONS
 700×23C | 25C | 28C | 32C | 35C | 38C
 650×25C | 28C
 24×1
 27×1 | 1-1/8 | 1-1/4
 20×1.50
 26×1.25 | 1.50 | 1.75
 27.5×1.75(650B×42)

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
700×23C	23-622	Wire	Black	Amber/Black	260	MAX 840/MAX 120
700×25C	25-622	Wire	Black	Amber/Black	290	MAX 805/MAX 115
700×28C	28-622	Wire	Black	Amber/Black	320	MAX 735/MAX 105
700×32C	32-622	Wire	Black	Amber/Black	390	MAX 665/MAX 95
700×35C	35-622	Wire	Black	Amber/Black	470	MAX 620/MAX 90
700×38C	38-622	Wire	Black	Amber/Black	450	300-620/45-90
650×25C	25-571	Wire	Black	Amber/Black	270	MAX 805/MAX 115
650×28C	28-571	Wire	Black	Amber/Black	290	MAX 750/MAX 105
24×1	25-520	Wire	Black	Amber/Black	240	MAX 805/MAX 115
27×1	25-630	Wire	Black	Amber	290	MAX 805/MAX 115
27×1-1/8	28-630	Wire	Black	Amber	310	MAX 735/MAX 105
27×1-1/4	32-630	Wire	Black	Amber	390	MAX 665/MAX 95
20×1.50	37-406	Wire	Black	Amber/Black	310	280-455/40-65
26×1.25	32-559	Wire	Black	Amber/Black	290	455-700/65-100
26×1.50	37-559	Wire	Black	Amber/Black	420	280-455/40-65
26×1.75	42-559	Wire	Black	Amber/Black	510*/490	280-455/40-65
27.5×1.75(650B×42)	42-584	Wire	Black	Amber/Black	520	280-525/40-75

*Amber side tire



SIZE VARIATIONS
 700×25C | 28C | 32C | 35C | 38C | 42C | 47C
 20×1.75
 26×1.50 | 1.75 | 2.00
 27.5×1.75
 28×1-1/2

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
700×25C	25-622	Wire	Black	Black + Reflective tape	620	620-755/90-110
700×28C	28-622	Wire	Black	Black + Reflective tape	690	550-685/80-100
700×32C	32-622	Wire	Black	Black + Reflective tape	840	345-515/50-75
700×35C	35-622	Wire	Black	Black + Reflective tape	900	345-515/50-75
700×38C	38-622	Wire	Black	Black + Reflective tape	940	345-515/50-75
700×42C	42-622	Wire	Black	Black + Reflective tape	1080	345-515/50-75
700×47C	47-622	Wire	Black	Black + Reflective tape	TBA	300-500/44-73
20×1.75	44-406	Wire	Black	Black + Reflective tape	720	280-590/40-85
26×1.50	38-559	Wire	Black	Black + Reflective tape	880	280-590/40-85
26×1.75	44-559	Wire	Black	Black + Reflective tape	990	250-450/35-65
26×2.00	48-559	Wire	Black	Black + Reflective tape	1080	250-450/35-65
27.5×1.75	44-584	Wire	Black	Black + Reflective tape	1030	MAX 590/MAX 85
28×1-1/2	40-635	Wire	Black	Black + Reflective tape	TBA	250-400/35-60

Pasela

TUBED



Supple and comfortable riding.




TourGuardPlus

TUBED



The toughest urban/city tire.






COMPACT

Minits Lite TUBED

Performance 20".



Other specs Microfile Pattern


SIZE VARIATIONS
 20×1.25 | 1-1/8 | 7/8

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
20×1.25	32-406	Folding	Black	Black/Blue/Red/Amber	170	455-700/65-100
20×1-1/8	28-451	Folding	Black	Black/Blue/Red/Amber	190	455-700/65-100
20×7/8	23-451	Folding	Black	Black/Blue/Red/Amber	165	600-900/85-130


SIZE VARIATIONS
 20×1.25 | 1-1/8 | 7/8


Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
20×1.25	32-406	Wire	Black	Black/Brown	250	455-700/65-100
20×1-1/8	28-451	Wire	Black	Black/Brown	260	455-700/65-100
20×7/8	23-451	Wire	Black	Black/Brown	220	600-900/85-130

Minits Tough TUBED




Tough 20".


Other specs Microfile Pattern



TourGuard TUBED



Puncture protected Tour.


SIZE VARIATIONS

 700×25C | 28C | 32C | 35C | 38C | 42C
 26×1.50 | 1.75 | 2.00
 27.5×1.75
 28×1-1/2

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
700×25C	25-622	Wire	Black	Black + Reflective tape	490	620-755/90-110
700×28C	28-622	Wire	Black	Black + Reflective tape	560	550-685/80-100
700×32C	32-622	Wire	Black	Black + Reflective tape	650	345-515/50-75
700×35C	35-622	Wire	Black	Black + Reflective tape	740	345-515/50-75
700×38C	38-622	Wire	Black	Black + Reflective tape	790	345-515/50-75
700×42C	42-622	Wire	Black	Black + Reflective tape	860	345-515/50-75
26×1.50	38-559	Wire	Black	Black + Reflective tape	700	280-590/40-85
26×1.75	44-559	Wire	Black	Black + Reflective tape	780	250-450/35-65
26×2.00	48-559	Wire	Black	Black + Reflective tape	890	250-450/35-65
27.5×1.75	44-584	Wire	Black	Black + Reflective tape	860	MAX 590/MAX 85
28×1-1/2	40-635	Wire	Black	Black + Reflective tape	TBA	250-400/35-60

Tour TUBED



A great budget urban/city tire.


SIZE VARIATIONS

 700×25C | 28C | 32C | 35C | 38C | 42C
 20×1.75
 26×1.50 | 1.75 | 2.00
 27.5×1.75

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
700×25C	25-622	Wire	Black	Black + Reflective tape	460	620-755/90-110
700×28C	28-622	Wire	Black	Black + Reflective tape	520	550-685/80-100
700×32C	32-622	Wire	Black	Black + Reflective tape	620	345-515/50-75
700×35C	35-622	Wire	Black	Black + Reflective tape	690	345-515/50-75
700×38C	38-622	Wire	Black	Black + Reflective tape	740	345-515/50-75
700×42C	42-622	Wire	Black	Black + Reflective tape	810	345-515/50-75
20×1.75	40-406	Wire	Black	Black + Reflective tape	580	280-590/40-85
26×1.50	38-559	Wire	Black	Black + Reflective tape	660	280-590/40-85
26×1.75	44-559	Wire	Black	Black + Reflective tape	730	250-450/35-65
26×2.00	48-559	Wire	Black	Black + Reflective tape	850	250-450/35-65
27.5×1.75	44-584	Wire	Black	Black + Reflective tape	810	MAX 590/MAX 85

WHEELCHAIR



visit our web site



Cross Town

TUBED

Durable, puncture protected 16".

SIZE VARIATIONS
 16×1-3/8

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
16×1-3/8	35-349	Wire	Black	Black + Reflective tape	390	450-750/65-107



HP406

TUBED

High pressure use, free style BMX.


SIZE VARIATIONS
 20×1.75

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
20×1.75	40-406	Wire	White/Black	Amber	380	280-590/40-85



©Daniel Hughes



New Ultima Marathon

TUBULAR

Tubular used in wheelchair competition marathon.



SPEC

 Other specs
 Light Butyl tube
 Removable Presta Valve 44mm

SIZE VARIATIONS
 27"×18mm

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
27"×18mm	—	Tubular	Black	Black	210	780-880/115-130



Rapide Plus

TUBULAR

Tubular used in wheelchair competition.



SPEC

 Other specs
 Butyl tube
 Presta Valve 34mm

SIZE VARIATIONS
 18"×18mm
 20"×18mm
 27"×18mm

Size	ETRTO	Bead	Tread Color	Sidewall Color	Weight (g)	Recommended inflation pressure (kPa/PSI)
18"×18mm	—	Tubular	Black	Black	145	780-880/115-130
20"×18mm	—	Tubular	Black	Black	165	780-880/115-130
27"×18mm	—	Tubular	Black	Black	240	780-880/115-130

TUBE




Visit our web site



R'AIR



Light weight, Supple and Flexible Racing tube.



Size	Valve	Weight(g)
W/O 700×18~23C	P/V 34mm	65
W/O 700×18~23C	P/V 48mm	66
W/O 700×18~23C	P/V 60mm	67
W/O 700×23~28C	P/V 34mm	76
W/O 700×23~28C	P/V 48mm	77
W/O 700×23~28C	P/V 60mm	78
W/O 700×31~35C	P/V 48mm	114
H/E 26×0.9~1.25, W/O 650×20~25C	P/V 34mm	71




DH Super Tube

High strength butyl rubber tube.



Size	Valve	Weight(g)
H/E 26×2.10~2.50	P/V 34mm	430
H/E 26×2.10~2.50	A/V 35mm	430



Standard Tube

The Standard Tube is available in a wide range of sizes.

Size	ETRTO	A/V 35mm	A/V48mm	A/V 60 degree	P/V 33mm	P/V 40mm	P/V 48mm	P/V 60mm	P/V 80mm
12×1.50~2.25	38/57-203	○		○					
16×1.50~2.25	38/57-305	○							
16×1-3/8	35/37-349	○					○		○
18×1.50~2.25	38/57-355	○							
20×1.25	32-406	○			○		○		
20×1-1/8	28/32-451						○	○	
20×1.50~2.25	38/57-406/420	○			○				
24×1.50~2.25	38/57-507/520	○							
26×1.25~1.75	32/47-559	○	○		○			○	
26×1.75~2.20	47/56-559	○	○		○			○	
26×2.20~2.50	56/64-559	○	○		○			○	
26×4.00~4.80	100/120-559				○*				
27.5×1.25~1.75 (650B)	32/47-584				○			○	
27.5×1.75~2.35 (650B)	47/60-584	○	○		○			○	
27.5×3.00~3.80 (650B)	76/97-584				○*				
29×1.75~2.35	47/60-622	○	○		○			○	
29×3.00~3.80	76/97-622				○/○*				
700×18~25C	18/25-622/630				○		○/○*	○	○
700×25~35C	25/35-622/630	○			○		○/○*	○	○
700×35~50C	35/50-622/630	○	○		○		○	○	

* Removable Core



©Daniel Hughes

ACCESSORIES



Seal Smart

Hypoallergenic tire sealant using a natural rubber compound (latex). A new product essential for Tubeless Compatible tires.

Specifications
1000ml ¹ , Walnut shell grains
500ml ² , Walnut shell grains
120ml ³ , Walnut shell grains

¹ Road: about 15~30 tires, MTB: about 8~20 tires
² Road: about 8~15 tires, MTB: about 4~10 tires
³ Road: about 2~4 tires, MTB: about 1~2 tires



Tubeless Tape

Rim tape for Tubeless Compatible tires and tubeless tires. It can also be used in conjunction with a tube.

Specifications
10m × 19mm(10.94yd × 0.75")
10m × 21mm(10.94yd × 0.83")
10m × 23mm(10.94yd × 0.91")
10m × 25mm(10.94yd × 0.98")
10m × 27mm(10.94yd × 1.06")
10m × 30mm(10.94yd × 1.18")



Tubeless Valve

Presta Tubeless Valve with air duct. Prevents blockage caused by tire sealant. Fits various type of tubeless rims.

Specifications
44mm, 4g, Aluminum, Black, Valve Core Tool
60mm, 5g, Aluminum, Black, Valve Core Tool NEW
80mm, 6g, Aluminum, Black, Valve Core Tool NEW



Rim Cement

A synthetic rubber base improves the durability and adhesiveness of Rim Cement. Favored amongst pro teams for adhesion and durability. Don't go cycling with poorly glued tubular tires. Available in 100 ml cans or 33 ml tubes.

Specifications
100ml in can
33ml in tube



Tubeless Tire Repair Kit

A Tubeless repair kit developed specifically for repairing MTB tubeless tires. Everything included to patch tires on the trail or in your garage. Repair, inflate, and hit the trail. Don't leave home without one.

Specifications
Cement 8cc in tube, Scissors, Rubber patch, Needle 75mm x 50mm



Valve Extender

You can extend the length of 2 piece Presta valves by using the Valve Extender. You may attach and remove valve cores by using the Valve Core Tool. The Valve Core Tool can be used as a valve cap.

Specifications
50mm, 2.6g Aluminum
20mm, 1.1g Aluminum



Tire Lever

This is a tire lever invented by a tire expert. It is shaped to make it difficult to damage the tube and comes with a dedicated pouch.

Specifications
Three Levers / Dedicated pouch



FlatAway

The FlatAway tire liner is a lightweight strip of Aramid fiber that protects against external punctures. It is excellent for touring or urban applications. Place it between your casing and your tube and ride with more security.

Specifications
Road Wheel Circumference 30mm wide
MTB 26" Wheel Circumference 40mm wide
27.5" & 29" Wheel Circumference 40mm wide



Poly-Lite Rim Tape

Poly-Lite Rim Tape is a thin, tough shield to protect your tube from the rim and spoke nipples. Great insurance against flats. Why take a risk that your tube may sustain damage from the rim itself.

Specifications
H/E 20" × 15mm
H/E 20" × 18mm
H/E 26" × 15mm
H/E 26" × 18mm
27.5" (650A/B) × 15mm
27.5" (650A/B) × 18mm
700, 27", 29" × 15mm
700, 27", 29" × 18mm



Valve Core Tool

You can attach and remove valve cores of the length of 2 piece Presta valves by using the Valve Core Tool. The Valve Core Tool can be used as a valve cap. It's available in 5 colors. Black, gold, blue, pink, silver.

Specifications
0.9g Aluminum, Black
0.9g Aluminum, Gold
0.9g Aluminum, Blue
0.9g Aluminum, Pink
0.9g Aluminum, Silver



©Daniel Hughes

⚠ CAUTION

- The product weight shown is an average weight. Actual product weights may vary slightly.
- The width of the product may vary slightly depending on individual differences and usage environments and conditions.
- The maximum recommended rating specifies the upper limit for internal pressure. Subtract 20% for minimum pressure, and adjust within that range as desired.
- Air pressure is calculated using the following formula: $100\text{kPa}=1\text{kgf/cm}^2=14.5\text{psi}$
- Please be sure to read the attached instruction manual. Keep the manual handy for future reference.
- Before buying products, please check your frame clearance to make sure it will fit your bicycle.
- If a child or a person who is not familiar with the product intends to use it, make sure a parent or someone who is familiar with the product to accompany him or her so that the child or person will not end up using it alone.
- Keep out of reach of small children. It may cause serious injury or damage.
- To store the product, avoid locations near heat sources such as a heater, locations where it may be subjected to rain or direct sunlight, or locations near oils and greases, organic solvents and so forth.
- Resins and rubbers used in the product gradually deteriorate regardless of use. Immediately stop using the product if you find any anomaly including discoloration, deformation and cracking.
- Check tire pressure before each ride.
- Make sure your tires are seated properly and check the surface of the tires visually and by test riding your bike after installing new tires or after long periods of not riding.
- Take note of the following points when using Tubeless Compatible tires.
 - Tire requires tube or special sealant to hold air.
 - Ensure you use a tire lever that is made of plastic.
 - If sealant has been used, do not use repair kits such as the Tubeless Tire Repair Kit or Rubber patch in the event of a puncture.
 - When installing tubes to tires, wipe clean any residual sealant on the inner lip of the rim or tire with a wet cloth or similar (riding with sealant remaining may cause the tire to roll off).
 - When using as a tubeless compatible, we recommend using an air compressor when inflating tires.
- Take note of the following points when using Seal Smart.
 - If in eyes or mouth: wash cautiously with water, get medical attention.
 - Inhalation: Immediately get medical attention if you feel pain or unusual.
 - If skin contact: wash away the parts attached to the skin with water. Immediately get medical attention if remain abnormal.
 - Not intended for use with other puncture repair additives.

- Pictures and illustrations may be slightly different from the original.
- Specifications may change without prior notice.
- Not all models may be available depending on the region of purchase.
- Details of products and services are correct as of Jun 2022.
- All rights reserved.

 <https://www.facebook.com/Panaracer/>



 https://www.instagram.com/Panaracer_world/



For more information, please visit our website.

panaracer.com

